



## JLH SERIES COMPACT LEVER HOISTS

# JLH SERIES COMPACT LEVER HOISTS

### SAFETY

- Weston® brake design with opposing double pawls, splits the load to opposite sides of the ratchet gear for greater load security
- Industrial-rated alloy steel hooks rotate 360° and slowly stretch to indicate overloading

### DURABILITY

- Grade 100 load chain is a smaller, more compact link with a greater working load limit and is Zinc plated for maximum corrosion protection
- The 4 pocket chain sprocket provides enhanced chain and lift wheel engagement for reduced vibration and smooth lifting
- Secured with Allen screws and lock nuts, the cast-steel safety latches are more durable than stamped steel latches and will not bend out of compliance with lifting regulations
- Durable, impact resistant, aluminum alloy housings
- The heat-treated load plates and case hardened corrosive resistant internal parts extend the life of the hoist
- Rugged vinyl pouch with belt loops and carrying strap included


### STANDARDS

- This product complies with ANSI / ASME B30.21 and HST-3 Standards
- Load tested to 125% of capacity with certificate



### JLH SERIES HOIST DIMENSIONS (IN.)

CAPACITY	A	B	C	D	E	F	G	H	L
1/4 TON	3-7/16	2-11/16	1-3/16	13/16	13/16	1-1/4	1-3/8	7-7/8	5-3/4
1/2 TON	4	3-3/16	1-7/8	1	1	1-3/8	1-5/8	9-13/16	6-5/16

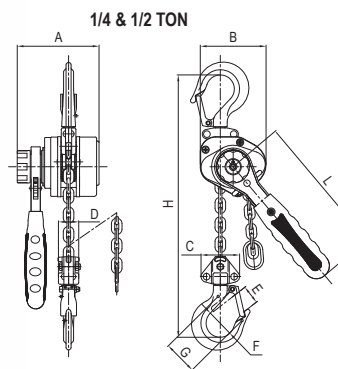

STOCK NUMBER	MODEL NUMBER	CAPACITY (T)	CAPACITY (lbs.)	STANDARD LIFT (ft.)	HEADROOM (in.)	LOAD CHAIN (dia/mm) X NO. OF FALLS	LEVER LENGTH (in.)	LBS. OF PULL TO LIFT CAPACITY	WEIGHT (lbs.)
<b>JLH SERIES LEVER HOISTS - 1/4 TON</b>									
181205	JLH-25-5	1/4	500	5	7-7/8	3.2 x 1	5-3/4	45	3.5
181210	JLH-25-10	1/4	500	10	7-7/8	3.2 x 1	5-3/4	45	4.4
181215	JLH-25-15	1/4	500	15	7-7/8	3.2 x 1	5-3/4	45	5.3
<b>JLH SERIES LEVER HOISTS - 1/2 TON</b>									
181505	JLH-50-5	1/2	1000	5	9-13/16	4.3 x 1	6-5/16	54	5.5
181510	JLH-50-10	1/2	1000	10	9-13/16	4.3 x 1	6-5/16	54	7.0
181515	JLH-50-15	1/2	1000	15	9-13/16	4.3 x 1	6-5/16	54	8.6

\*CUSTOM LIFTS AVAILABLE IN ALL CAPACITIES IN 10 FT INCREMENTS

## JLP-A SERIES MINI-PULLERS



# JLP-A SERIES MINI-PULLERS

### SAFETY

- Weston® brake design with opposing double pawls, splits the load to opposite sides of the ratchet gear for greater load security
- Industrial rated alloy steel hooks rotate 360° for easy rigging and slowly stretch to indicate an overload situation

### DURABILITY

- Intended for the harshest environments, the heat-treated load plates and case hardened corrosive resistant internal parts extend the life of the hoists and gives industry leading corrosion resistance
- The lightweight design with shorter handle and smaller body are ideal for confined areas and low headroom applications
- Grade 80 load chain is black oxide coated for corrosion resistance
- Impact resistant all steel construction for added durability and protection


### STANDARDS

- This product complies with ANSI / ASME B30.21 and HST-3 Standards
- Load tested to 125% of capacity with certificate



### JLP-A SERIES HOIST DIMENSIONS (IN.)

CAPACITY	A	B	C	D	E	F	G	H	L
1/4 TON	3-1/8	2-7/16	1-3/4	1	1-3/8	1-1/4	1-3/8	8-1/4	5-15/16
1/2 TON	3-3/4	2-11/16	1-7/8	1	1-3/8	1-3/8	1-5/8	10-1/16	8-7/16

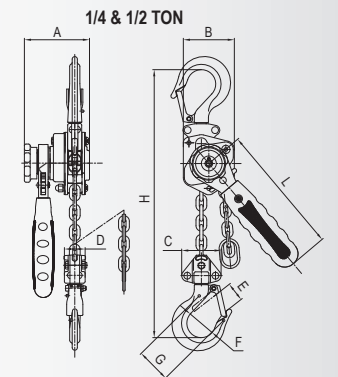

STOCK NUMBER	MODEL NUMBER	CAPACITY (T)	CAPACITY (lbs.)	STANDARD LIFT (ft.)	HEADROOM (in.)	LOAD CHAIN (dia/mm) X NO. OF FALLS	LEVER LENGTH (in.)	LBS. OF PULL TO LIFT CAPACITY	WEIGHT (lbs.)
<b>JLP-A SERIES LEVER HOISTS - 1/4 TON</b>									
287100	JLP-025A-5	1/4	500	5	8-1/4	4 x 1	5-15/16	60	4.6
287101	JLP-025A-10	1/4	500	10	8-1/4	4 x 1	5-15/16	60	5.8
287102	JLP-025A-15	1/4	500	15	8-1/4	4 x 1	5-15/16	60	7.0
<b>JLP-A SERIES LEVER HOISTS - 1/2 TON</b>									
287200	JLP-050A-5	1/2	1000	5	10-1/16	4.3 x 1	8-7/16	86	5.2
287201	JLP-050A-10	1/2	1000	10	10-1/16	4.3 x 1	8-7/16	86	6.8
287202	JLP-050A-15	1/2	1000	15	10-1/16	4.3 x 1	8-7/16	86	8.3

\*CUSTOM LIFTS AVAILABLE IN ALL CAPACITIES IN 10 FT INCREMENTS