

Chicago™ Grips

1656 Series

- Round, smooth inside jaw contour on this series of grips is ideal for bare ACSR
- Smooth jawed grips with maximum contact are less likely to cause cable deformation



1656-30



1656-40

A 4,500 lb (2,041 kg) Maximum Safe Load


Cat. No.	Cable Type	Cable Diameter	Hot Latch	Spring	Locking Handle	Jaw Type	Jaw Length	Weight
1656-20	Copper, ACSR, AAC	0.20" to 0.40" (5.08 to 10.16 mm)	—	—	●	Round	4" (10.2 cm)	2.7 lb (1.2 kg)
1656-20H	Copper, ACSR, AAC	0.20" to 0.40" (5.08 to 10.16 mm)	●	—	●	Round	4" (10.2 cm)	3.15 lb (1.43 kg)
S1656-20H	Copper, ACSR, AAC	0.20" to 0.40" (5.08 to 10.16 mm)	●	●	●	Round	4" (10.2 cm)	3.15 lb (1.43 kg)
1656-30	Copper, ACSR, AAC	0.31" to 0.53" (7.87 to 13.46 mm)	—	—	●	Round	4.75" (12.1 cm)	3.4 lb (1.5 kg)
1656-30H	Copper, ACSR, AAC	0.31" to 0.53" (7.87 to 13.46 mm)	●	—	●	Round	4.75" (12.1 cm)	3.95 lb (1.79 kg)
S1656-30H	Copper, ACSR, AAC	0.1" to 0.53" (7.87 to 13.46 mm)	●	●	●	Round	4.75" (12.1 cm)	4 lb (1.81 kg)

B 8,000 lb (3,629 kg) Maximum Safe Load

Cat. No.	Cable Type	Cable Diameter	Hot Latch	Spring	Locking Handle	Jaw Type	Jaw Length	Weight
1656-40	Copper, ACSR, AAC	0.53" to 0.74" (13.46 to 18.80 mm)	—	—	●	Round	5.5" (14 cm)	7.4 lb (3.4 kg)
1656-40H	ACSR, AAC	0.53" to 0.74" (13.46 to 18.80 mm)	●	—	●	Round	5.5" (14 cm)	8.5 lb (3.92 kg)
S1656-40H	ACSR, AAC	0.53" to 0.74" (13.46 to 18.80 mm)	●	●	—	Round	5.5" (14 cm)	8.65 lb (3.92 kg)
1656-50	ACSR, AAC	0.74" to 0.86" (18.80 to 21.84 mm)	—	—	●	Round	5.5" (14 cm)	7.5 lb (3.4 kg)
1656-50H	ACSR, AAC	0.74" to 0.86" (18.80 to 21.84 mm)	●	—	●	Round	5.5" (14 cm)	8.45 lb (3.83 kg)
S1656-50H	ACSR, AAC	0.74" to 0.86" (18.80 to 21.84 mm)	●	●	—	Round	5.5" (14 cm)	8.45 lb (3.83 kg)
1656-60	ACSR, AAC	0.86" to 0.96" (21.84 to 24.38 mm)	—	—	●	Round	5.5" (14 cm)	7.8 lb (3.5 kg)
1656-60H	ACSR, AAC	0.86" to 0.96" (21.84 to 24.38 mm)	●	—	●	Round	5.5" (14 cm)	8.4 lb (3.81 kg)
S1656-60H	ACSR, AAC	0.86" to 0.96" (21.84 to 24.38 mm)	●	●	—	Round	5.5" (14 cm)	8.36 lb (3.79 kg)

1628-16P Series

- Round jaws are shaped to provide maximum contact with the cable, virtually eliminating cable deformation
- Designed for large-diameter ACSR cables
- These grips are special order only; please allow 30 days for delivery; special order grips are not returnable

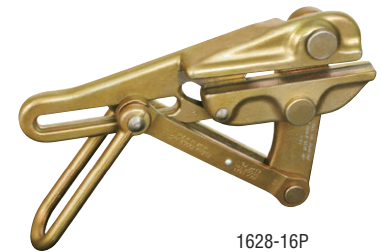

1628-16P

C 15,000 lb (6,803 kg) Maximum Safe Load

Cat. No.	Cable Type	Cable Diameter	Hot Latch	Spring	Locking Handle	Jaw Type	Jaw Length	Weight
162816PE	Copper, ACSR, AAC	0.31" to 0.33" (7.87 to 8.38 mm)	—	—	—	Round	7.25" (18.4 cm)	17.0 lb (7.7 kg)
162816PF	Copper, ACSR, AAC	0.33" to 0.39" (8.38 to 9.90 mm)	—	—	—	Round	7.25" (18.4 cm)	17.0 lb (7.7 kg)
162816PG	Copper, ACSR, AAC	0.40" to 0.45" (9.93 to 11.50 mm)	—	—	—	Round	7.25" (18.4 cm)	17.0 lb (7.7 kg)
162816PH	Copper, ACSR, AAC	0.46" to 0.52" (11.53 to 13.08 mm)	—	—	—	Round	7.25" (18.4 cm)	17.0 lb (7.7 kg)
162816PI	Copper, ACSR, AAC	0.52" to 0.58" (13.11 to 14.68 mm)	—	—	—	Round	7.25" (18.4 cm)	17.0 lb (7.7 kg)
162816PJ	Copper, ACSR, AAC	0.58" to 0.64" (14.71 to 16.25 mm)	—	—	—	Round	7.25" (18.4 cm)	17.0 lb (7.7 kg)
1628-16PK	Copper, ACSR, AAC	0.64" to 0.70" (16.28 to 17.86 mm)	—	—	—	Round	7.25" (18.4 cm)	17.0 lb (7.7 kg)
162816PL	Copper, ACSR, AAC	0.71" to 0.76" (17.89 to 19.43 mm)	—	—	—	Round	7.25" (18.4 cm)	17.0 lb (7.7 kg)
162816PM	Copper, ACSR, AAC	0.77" to 0.82" (19.46 to 21.03 mm)	—	—	—	Round	7.25" (18.4 cm)	17.0 lb (7.7 kg)
162816PN	Copper, ACSR, AAC	0.83" to 0.89" (21.06 to 22.61 mm)	—	—	—	Round	7.25" (18.4 cm)	17.0 lb (7.7 kg)

The "H" suffix does not indicate Hot Latch for this item.