



## Hex and Round Bars

- Provides extra leverage when positioning steel members and aligning bolt holes
- Forged fit-up bar is pointed on one end
- Chisel-end is at a 15° angle to give greater leverage
- Cat. No. 3246TT features tether hole for working at height



Hex Bars			
Cat. No.	Overall Length	Body Diameter	End
3242	30" (76.2 cm)	3/4" (1.9 cm)	15°
3243	36" (91.4 cm)	7/8" (2.2 cm)	15°
3244	24" (61 cm)	3/4" (1.9 cm)	15°
3240	30" (76.2 cm)	3/4" (1.9 cm)	Straight

Round Bars			
Cat. No.	Overall Length	Body Diameter	End
3245	30" (76.2 cm)	3/4" (1.9 cm)	15°
3246	36" (91.4 cm)	7/8" (2.2 cm)	15°
3246TT	36" (91.4 cm)	7/8" (2.2 cm)	15°
3247	24" (61 cm)	3/4" (1.9 cm)	15°
3248	30" (76.2 cm)	7/8" (2.2 cm)	15°
3241	30" (76.2 cm)	3/4" (1.9 cm)	Straight

## Barrel-Type Drift Pins

- Machined from quality alloy steel
- Tapers are uniform and blend into body diameter
- Tough, drop-forged steel will properly end-pein in use
- Heat-treated for strength
- Black finish for rust resistance



Cat. No.	Overall Length	Diameter	Point Diameter
3260	7.5" (19.1 cm)	0.688" (1.8 cm)	0.313" (7.95 mm)
3261	8" (20.3 cm)	0.813" (2.1 cm)	0.438" (11.11 mm)
3262	8" (20.3 cm)	0.938" (2.4 cm)	0.500" (12.70 mm)
3263	8" (20.3 cm)	1.063" (2.7 cm)	0.563" (14.29 mm)

## Broad Head Bull Pins




- Forged, heat-treated bull pin increases efficiency by providing a larger striking surface
- Angled head and smooth blending of radii increase strength and reduce the danger of chipping
- Below the head, squared-off shoulders have been forged to provide a surface for applying wrench to loosen wedged bull pins
- Added resistance to "mushrooming" permits much longer use than conventional designs and the even taper reduces binding and hang-up
- Cat. Nos. 3256TT and 3255TT feature tether hole for working at height

Cat. No.	Overall Length	Diameter	Point Diameter
3255	13.75" (34.9 cm)	1-1/4" (3.2 cm)	0.313" (7.9 mm)
3256	10" (25.4 cm)	1-1/16" (2.7 cm)	0.25" (6.4 mm)
Broad Head Bull Pins with Tether Hole For Working At Height			
3255TT	13.75" (34.9 cm)	1-1/4" (3.2 cm)	0.313" (7.9 mm)
3256TT	10" (25.4 cm)	1-1/16" (2.7 cm)	0.25" (6.4 mm)

OSHA 1926.301 (c) specifically states: "Impact tools, such as drift pins, wedges and chisels, shall be kept free of mushroomed heads."

## Standard Bull Pins

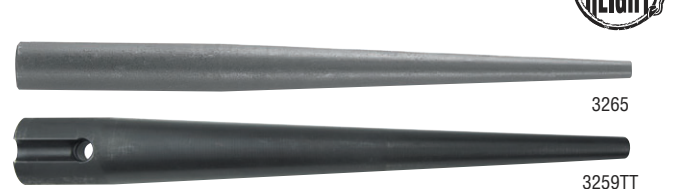

- Machined from quality alloy steel
- Heat-treated for strength
- Black finish for rust resistance

Cat. No.	Overall Length	Diameter	Point Diameter
3259	12" (30.5 cm)	1-5/16" (3.3 cm)	0.44" (11.1 mm)
3265	12" (30.5 cm)	1-1/4" (3.2 cm)	0.44" (11.1 mm)
Standard Bull Pins with Tether Hole For Working At Height			
3259TT	12" (30.5 cm)	1-5/16" (3.3 cm)	0.44" (11.1 mm)

OSHA 1926.301 (c) specifically states: "Impact tools, such as drift pins, wedges and chisels, shall be kept free of mushroomed heads."

