

Specialty Driver Set

Reversible Impact-Driver Set

- Rugged, hand-impact driver turns rusted, frozen, or other stubborn screws.
- Can also be used with 3/8" square-drive impact sockets.
- Internal, spring-loaded, helical design transforms the impact of a hammer blow to up to 200 ft.-lbs. of shock torque.
- Easily reverses for tightening or loosening screws.
- Constructed of high-grade alloy steel that has been heat-treated for added strength.
- Reclosable, seal-tight vinyl pouch with hang-up grommet.



70220

Cat. No.	Description	Weight (lbs.)
70220	pouched impact-driver set with 3/8" * (89 mm) -square-drive fitting adapter for 5/16" (8 mm) hex bits, 4 assorted hex screwdriver bits 5/16" (8 mm) and 1/2" (38 mm) regular slotted tip, #2 and #4 Phillips-tip	2.15
Replacement Screwdriver Bits		
70229	replacement set of 5/16" (8 mm)-drive screwdriver bits (5/16" (8 mm) and 1/2" (38 mm) regular slotted tip, #2 and #4 Phillips-tip) packed in reclosable, seal-tight vinyl pouch	.25

Torque Screwdrivers

Torque Screwdriver Set

- Compact, easy to use set includes the Torque Screwdriver, a 6-piece bit set and a ruggedged case with foam inserts for a tight, organized fit.
- Increased usability and readability plus a wider torque range (5-40 in. lbs).
- Tri-lobular design with a textured finish for better grip.
- Lightweight, aluminum frame.
- N.I.S.T. traceable calibration certificate.

Cat. No.	Contains	Weight (lbs.)
57032	Set includes six 3-1/2" (89 mm) power drivers: #1 and #2 Phillips; 3/16" (5 mm) and 1/4" (6 mm) Slotted, and #1 and #2 Square	1.0



57032


Cushion-Grip Nut Driver Sets

Features:



Tip-Ident® quickly identifies nut driver and size.

Internal flanges provide solid, twist-resistant shaft anchor.

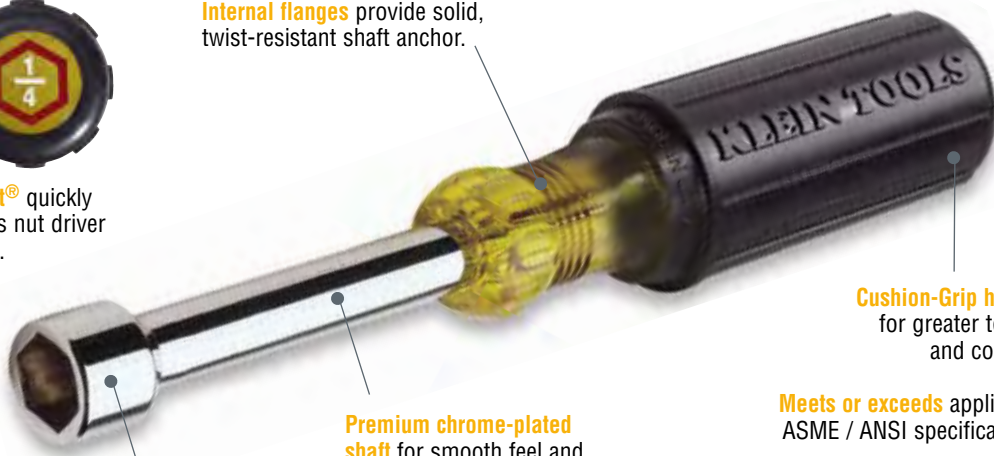

Cushion-Grip handle for greater torque and comfort.

Meets or exceeds applicable ASME / ANSI specifications.

Full hollow shafts facilitate work on stacked circuit boards or other long bolt applications.

Premium chrome-plated shaft for smooth feel and corrosion resistance.

Handle end is also color coded for easy identification.



All dimensions are in inches and (millimeters).



Cushion-Grip Nut Driver Sets

Switch Drive™ Handle Power Nut Driver Set **NEW!**

Additional Features:

- Allows for easy alternating between power tool and hand tool on job site.
- Quick-Release mechanism converts power tool accessory to hand tool in a snap.
- Includes Switch Drive™ handle and 3 nut driver sizes.
- Drivers are impact rated.



32701

Cat. No.	Hex Sizes	Nut Driver Length	Overall Length	Weight (lbs.)
32701	1/4", 5/16", 3/8"	2" (51 mm)	7.75" (197 mm)	.70

Refer to the power tool accessories and systems section for more information.

NOTE: Read and follow safety instructions in power tool owner's manual.

Cushion-Grip Nut Drivers

Stubby Nut Drivers – 1-1/2" (38 mm) Shafts

Additional Features:

- Full hollow-shaft for long bolt and studs applications.
- Stubby nut drivers allow for work in close quarters.



610-5/16

Cat. No.	Color Code	Hex Size	Shaft Length	Overall Length	Weight (lbs.)
610-1/4	red	1/4"	1-1/2" (38 mm)	3-1/2" (89 mm)	.10
610-5/16	yellow	5/16"	1-1/2" (38 mm)	3-1/2" (89 mm)	.10

Hollow-Shaft Nut Drivers – 3" (76 mm) Shafts

Additional Features:

- Standard length for most long bolt and stud applications.



630-11mm

Imperial

Cat. No.	Color Code	Hex Size	Shaft Length	Overall Length	Weight (lbs.)
630-3/16	black	3/16"	3" (76 mm)	6-3/4" (171 mm)	.20
630-1/4	red	1/4"	3" (76 mm)	6-3/4" (171 mm)	.20
630-5/16	yellow	5/16"	3" (76 mm)	6-3/4" (171 mm)	.20
630-11/32	green	11/32"	3" (76 mm)	6-3/4" (171 mm)	.20
630-3/8	blue	3/8"	3" (76 mm)	6-3/4" (171 mm)	.20
630-7/16	brown	7/16"	3" (76 mm)	7-5/16" (186 mm)	.25
630-1/2	red	1/2"	3" (76 mm)	7-5/16" (186 mm)	.25
630-9/16	orange	9/16"	4" (102 mm)	9-3/8" (238 mm)	.35
630-5/8	yellow	5/8"	4" (102 mm)	9-3/8" (238 mm)	.35

Metric

Cat. No.	Color Code	Hex Size Metric	Shaft Length	Overall Length	Weight (lbs.)
630-4mm	red	4 mm	3" (76 mm)	6-3/4" (171 mm)	.20
630-4.5mm	yellow	4.5 mm	3" (76 mm)	6-3/4" (171 mm)	.20
630-5mm	black	5 mm	3" (76 mm)	6-3/4" (171 mm)	.20
630-6mm	red	6 mm	3" (76 mm)	6-3/4" (171 mm)	.20
630-7mm	orange	7 mm	3" (76 mm)	6-3/4" (171 mm)	.20
630-8mm	yellow	8 mm	3" (76 mm)	6-3/4" (171 mm)	.20
630-10mm	blue	10 mm	3" (76 mm)	6-3/4" (171 mm)	.20
630-11mm	brown	11 mm	3" (76 mm)	7-5/16" (186 mm)	.20

Refer to the insulated section for insulated nut drivers.

All dimensions are in inches and (millimeters).



www.kleintools.com

See page 310 for additional information on warnings.

