


LINEMAN'S

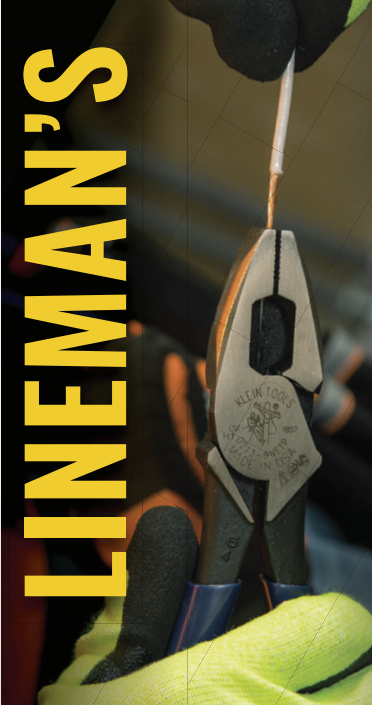

HIGH-LEVERAGE LINEMAN'S PLIERS

Unique handle tempering helps absorb the "snap" when cutting wire

Hot-riveted joint ensures smooth action and no handle wobble

Rivet is closer to cutting edge

Precision-hardened plier head for on-the-job toughness

46% GREATER*

cutting and gripping power than other pliers designs

Induction hardened cutting knives for long life

FORGED STEEL

from Klein's US-made proprietary blend

Sure-gripping cross-hatched knurled jaws



High-Leverage Lineman's Pliers

Includes core High-Leverage Side-Cutting features plus:

- Combination polished and black-oxide finish
- New England nose (Cat. No. J20008 has New England Tapered nose; Cat. No. D213-9 has Square nose)
- Glow-in-the-Dark grips are easily spotted in dark or low lit areas (Cat. No. D2000-9NEGLW)



D213-9NE

HANDLE FINISH

NEW



SPLIT TETHER RING
D213-9NETT



Plain



Plastic-Dipped



GLOW-IN-THE-DARK
Plastic-Dipped



Heavy,
Plastic-Dipped



JOURNEYMAN™
Dual-Material



INS INSULATED
2-Layer
Protection



EINS INSULATED
3-Layer
Protection



RINS INSULATED
Thick Multi-Layer
Protection

1000 V

1000 V

1000 V

Cat. No.	Jaw Length	Jaw Width	Jaw Thickness	Knife Length	Handle Color	Handle Finish	Overall Length
213-9NE	1.91" (4.9 cm)	1.25" (3.18 cm)	0.62" (1.57 cm)	0.781" (1.98 cm)	Black	Plain	9.27" (23.5 cm)
2138NEEINS	1.438" (3.65 cm)	1.22" (3.10 cm)	0.625" (1.59 cm)	0.75" (1.91 cm)	Orange/Gray	3-Layer Insulation	8.82" (22.40 cm)
★ 2139NERINS	1.91" (4.9 cm)	1.25" (3.2 cm)	0.625" (1.6 cm)	0.781" (2 cm)	Orange/Light Gray	2-Layer Insulation	9.5" (24.1 cm)
2139NEEINS	1.91" (4.9 cm)	1.25" (3.2 cm)	0.625" (1.59 cm)	0.781" (1.98 cm)	Orange/Gray	3-Layer Insulation	9.53" (24.21 cm)
D213-9	1.91" (4.9 cm)	1.24" (3.1 cm)	0.625" (1.59 cm)	0.781" (1.98 cm)	Dark Blue	Plastic-Dipped	9.29" (23.6 cm)
D213-8NE	1.438" (3.65 cm)	1.21" (3.07 cm)	0.625" (1.59 cm)	0.719" (1.83 cm)	Dark Blue	Plastic-Dipped	8.59" (21.82 cm)
D213-9NE	1.91" (4.9 cm)	1.25" (3.18 cm)	0.625" (1.59 cm)	0.781" (2 cm)	Dark Blue	Plastic-Dipped	9.33" (23.70 cm)
D213-9NE-INS	1.91" (4.9 cm)	1.25" (3.18 cm)	0.625" (1.59 cm)	0.781" (2 cm)	Orange	2-Layer Insulation	9.68" (24.59 cm)
D213-9NETT	1.91" (4.9 cm)	1.25" (3.18 cm)	0.625" (1.59 cm)	0.781" (2 cm)	Dark Blue	Plastic-Dipped	9.33" (23.7 cm)
HD213-9NE	1.91" (4.9 cm)	1.25" (3.18 cm)	0.625" (1.59 cm)	0.781" (2 cm)	Light Red	Heavy Plastic-Dipped	9.34" (23.72 cm)
J2138NE	1.441" (3.66 cm)	1.209" (3.07 cm)	0.613" (1.56 cm)	0.719" (1.83 cm)	Dark Blue/Black	Journeyman™ Dual-Material	8.89" (22.58 cm)
J213-9NE	1.91" (4.9 cm)	1.25" (3.18 cm)	0.625" (1.59 cm)	0.781" (2 cm)	Dark Blue/Black	Journeyman™ Dual-Material	9.55" (24.26 cm)
With heavy-duty cutting knives designed to cut ACSR, screws, nails and most hardened wire							
20009NEEINS	1.594" (4.05 cm)	1.25" (3.18 cm)	0.613" (1.56 cm)	0.797" (2.02 cm)	Orange/Gray	3-Layer Insulation	9.53" (24.21 cm)
D2000-7	1.284" (3.26 cm)	1.03" (2.62 cm)	0.53" (1.35 cm)	0.75" (1.91 cm)	Light Blue	Plastic-Dipped	7.77" (19.74 cm)
D2000-8	1.44" (3.66 cm)	1.109" (2.82 cm)	0.6" (1.52 cm)	0.719" (1.83 cm)	Light Blue	Plastic-Dipped	8.59" (21.82 cm)
D2000-9NE	1.594" (4.05 cm)	1.25" (3.18 cm)	0.6" (1.52 cm)	0.781" (1.98 cm)	Light Blue	Plastic-Dipped	9.33" (23.70 cm)
D2000-9NE-INS	1.594" (4.05 cm)	1.25" (3.18 cm)	0.6" (1.52 cm)	0.781" (1.98 cm)	Orange	2-Layer Insulation	9.68" (24.59 cm)
D2000-9NEGLW	1.594" (4.05 cm)	1.25" (3.18 cm)	0.6" (1.52 cm)	0.781" (1.98 cm)	Glow-in-the-Dark	Plastic-Dipped	9.33" (23.70 cm)
HD2000-9NE	1.594" (4.05 cm)	1.25" (3.18 cm)	0.6" (1.52 cm)	0.797" (2.02 cm)	Light Red	Heavy Plastic-Dipped	9.34" (23.72 cm)
J20008	1.441" (3.66 cm)	1.11" (2.82 cm)	0.6" (1.52 cm)	0.719" (1.83 cm)	Light Blue/Black	Journeyman™ Dual-Material	8.76" (22.25 cm)
J2000-9NE	1.594" (4.05 cm)	1.25" (3.18 cm)	0.613" (1.56 cm)	0.797" (2.02 cm)	Light Blue/Black	Journeyman™ Dual-Material	9.55" (24.26 cm)

