


Screwdrivers, Nut Drivers & Accessories

Offering a variety of tip types, hex sizes, shaft lengths, and handle designs, Klein has the screwdrivers and nut drivers professionals demand to get the job done with comfort and ease of use.

For Professionals...
Since 1857™




Introduction – Screwdrivers, Nut Drivers & Accessories

Klein screwdrivers give professionals extra-quality features that have made the Klein name famous for hand tools – features that assure greater convenience, comfort and efficiency in use, plus exceptional strength and durability.

All Klein drivers are made of the highest quality tempered steel, carefully heat-treated for maximum strength. Shafts have integral flanges that provide an extra-strong, torque-proof anchor in the handle. Strong, durable black tips are forged and precision ground with square edges to fit screw openings securely. They resist slippage and provide positive turning action.

Cushion-Grip screwdrivers feature super-comfortable, sure-grip handles on top-quality blades for the professional. All Klein screwdrivers meet or exceed applicable ANSI and MIL specifications.

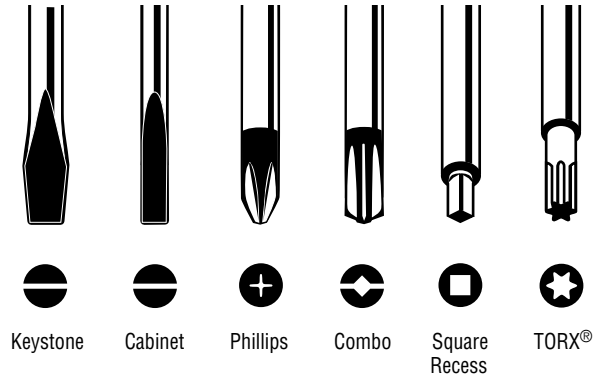

Using Screwdrivers and Nut Drivers

The size of the screw or nut and the type of opening it has determines which driver to use. Here are a few tips on how to use a driver that can be of benefit, because screwdrivers are the most often misused and abused hand tools of all.

- 1. Never use a driver to do another tool's job.**
Using a driver as a pry bar, scraper, or a chisel can ruin the tool, spoil the work and cause injury.
- 2. Never push a driver beyond its capacity.**
Make a pilot hole for the screw for easier driving. Use square-shank drivers for heavy work.
- 3. Never expose a driver to excessive heat.**
Direct flame can draw the temper from the metal, weakening and possibly warping it, making it unsafe and inefficient to use.

- 4. Never use a driver at an angle to the screw.**
Always keep the shank perpendicular to the screw head. Driving at an angle or using a point that is too small can spoil the screw or slip and damage the work.
- 5. Never depend on a driver's handle or covered blade to insulate you from electricity.** Plastic and Cushion-Grip handles are intended only to provide a firm, comfortable grip. Insulated blades are intended only as a protective measure against shorting out components. Only use insulated tools that are marked with the official international 1000-volt rating symbol if there is any chance that the tool will make contact with an energized source.
- 6. Discard damaged or worn drivers.**

TORX® is a registered trademark of Acument Intellectual Properties, LLC.

Cushion-Grip Screwdriver Sets

Features:



All dimensions are in inches and (millimeters).



www.kleintools.com

See page 310 for additional information on warnings.

Cushion-Grip Screwdrivers

Keystone-Tip Screwdrivers – Heavy-Duty Square-Shanks

Additional Features:

- Heavy-duty square shank for wrench-assisted turning.
- Bolster reinforces shank for hard use.
- Designed for the most demanding uses.




Cat. No.	Tip Size	Shank Length	Overall Length	Weight (lbs.)
600-4	1/4" (6 mm)	4" (102 mm)	8-11/32" (212 mm)	.25
600-6	5/16" (8 mm)	6" (152 mm)	10-15/16" (278 mm)	.40

Cat. No.	Tip Size	Shank Length	Overall Length	Weight (lbs.)
600-8	3/8" (10 mm)	8" (203 mm)	13-7/16" (341 mm)	.65
600-12	1/2" (13 mm)	12" (305 mm)	17-7/16" (443 mm)	.80

Keystone-Tip Screwdrivers – Heavy-Duty Round-Shanks

Additional Features:

- Built to handle the tough jobs with ease.
- Hex bolster reinforces shank for hard use and allows wrench assisted turning.

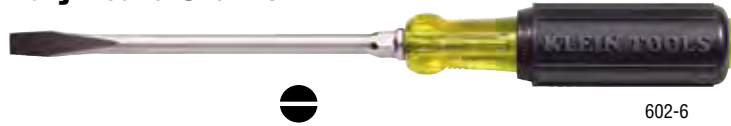

Cat. No.	Tip Size	Shank Length	Overall Length	Weight (lbs.)
602-3	7/32" (5 mm)	3" (76 mm)	6-3/4" (171 mm)	.15
600-1	5/16" (8 mm)	1-1/2" (38 mm)	3-7/16" (87 mm)	.10
602-4	1/4" (6 mm)	4" (102 mm)	8-11/32" (212 mm)	.25

Cat. No.	Tip Size	Shank Length	Overall Length	Weight (lbs.)
602-6	5/16" (6 mm)	6" (152 mm)	10-15/16" (278 mm)	.35
602-8	3/8" (10 mm)	8" (203 mm)	13-7/16" (341 mm)	.55
602-10	3/8" (10 mm)	10" (254 mm)	15-7/16" (392 mm)	.60
602-12	3/8" (10 mm)	12" (305 mm)	17-7/16" (443 mm)	.65

* Bolster not available on Cat. No. 600-1

Cabinet-Tip Screwdrivers – Round-Shanks

Additional Feature:

- Narrow cabinet-tip permits blade access where space is limited.




Cat. No.	Tip Size	Shank Length	Overall Length	Weight(lbs.)
601-4	3/16" (5 mm)	4" (102 mm)	7-3/4" (197 mm)	.15
601-6	3/16" (5 mm)	6" (152 mm)	9-3/4" (248 mm)	.15
601-8	3/16" (5 mm)	8" (203 mm)	11-3/4" (298 mm)	.20
601-10	3/16" (5 mm)	10" (254 mm)	13-3/4" (349 mm)	.20

Cat. No.	Tip Size	Shank Length	Overall Length	Weight(lbs.)
Heavy-Duty Shanks				
605-4	1/4" (6 mm)	4" (102 mm)	8-11/32" (212 mm)	.25
605-6	1/4" (6 mm)	6" (152 mm)	10-11/32" (263 mm)	.30
605-8	1/4" (6 mm)	8" (203 mm)	12-11/32" (314 mm)	.30
605-10	1/4" (6 mm)	10" (254 mm)	14-11/32" (365 mm)	.35

Combo-Tip Screwdrivers – Round-Shanks

Additional Feature:

- Precision machined tip designed for combination head screws.

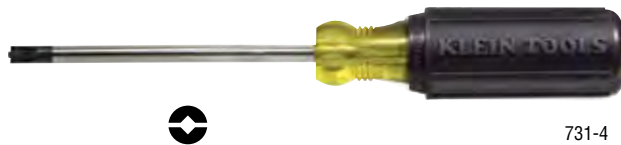

Cat. No.	Tip Size	Shank Length	Overall Length	Weight (lbs.)
731-4	#1 combo	4" (102 mm)	8-11/32" (212 mm)	.30
732-4	#2 combo	4" (102 mm)	8-11/32" (212 mm)	.30

Profiliated Phillips-Tip Screwdrivers – Round-Shanks

Additional Features:

- Precision-machined tips provide a more consistent geometric symmetry than conventional Phillips screwdrivers.
- Provides accurate fit and torque without slippage.



Cat. No.	Tip Size	Shank Length	Overall Length	Weight (lbs.)
603-1	#2	1-1/2" (38 mm)	3-7/16" (87 mm)	.10
603-3	#1	3" (76 mm)	6-3/4" (171 mm)	.15
603-4	#2	6" (152 mm)	11" (279 mm)	.35

Cat. No.	Tip Size	Shank Length	Overall Length	Weight (lbs.)
603-6	#3	6" (152 mm)	11" (279 mm)	.35
603-7	#2	7" (178 mm)	11-5/16" (287 mm)	.30
603-10	#2	10" (254 mm)	14-5/16" (364 mm)	.35

All dimensions are in inches and (millimeters).




Cushion-Grip Screwdrivers

Electronics Screwdrivers

Additional Feature:

- Rotating cap for optimum and precise control.

Cat. No.	Tip Type	Tip Size	Shank Length	Overall Length	Weight (lbs.)
614-2	cabinet	1/16"	2" (51 mm)	5-1/2" (140 mm)	.05
613-3	Phillips	#0	3" (76 mm)	6-1/2" (165 mm)	.05
614-3	cabinet	3/32"	3" (76 mm)	6-1/2" (165 mm)	.05



614-6

Cat. No.	Tip Type	Tip Size	Shank Length	Overall Length	Weight (lbs.)
614-4	cabinet	1/8"	4" (102 mm)	7-1/2" (191 mm)	.05
614-6	cabinet	1/8"	6" (152 mm)	9-1/2" (241 mm)	.05

Miniature Screwdrivers

Additional Feature:

- Precision tip for exact fit and rigorous applications.

Cat. No.	Tip Type	Tip Size	Shank Length	Overall Length	Weight (lbs.)
604-3	Phillips	#0	3" (76 mm)	5-3/4" (146 mm)	.04
606-2	keystone	1/16" (1.5 mm)	2" (51 mm)	4-3/4" (121 mm)	.03
607-2	cabinet	3/32" (2 mm)	2" (51 mm)	4-3/4" (121 mm)	.03
607-3	cabinet	3/32" (2 mm)	3" (76 mm)	5-3/4" (146 mm)	.04
607-4	cabinet	3/32" (2 mm)	4" (102 mm)	6-3/4" (171 mm)	.04
608-2	cabinet	1/8" (3 mm)	2" (51 mm)	4-3/4" (121 mm)	.03



608-6

Cat. No.	Tip Type	Tip Size	Shank Length	Overall Length	Weight (lbs.)
608-3	cabinet	1/8" (3 mm)	3" (76 mm)	5-3/4" (146 mm)	.04
608-4	cabinet	1/8" (3 mm)	4" (102 mm)	6-3/4" (171 mm)	.05
608-6	cabinet	1/8" (3 mm)	6" (152 mm)	8-3/4" (222 mm)	.05
608-8	cabinet	1/8" (3 mm)	8" (203 mm)	10-3/4" (273 mm)	.05
608-10	cabinet	1/8" (3 mm)	10" (254 mm)	12-3/4" (324 mm)	.05

Coated Cabinet-Tip Screwdrivers – Round-Shanks

Additional Features:

- Plastic coated for circuit protection only. NOT INSULATED.
- Special plastic coating resists cutting, cracking and chipping.
- Thin coating permits use in confined areas.

Cat. No.	Tip Size	Shank Length	Overall Length	Weight (lbs.)
620-3	3/16" (5 mm)	3" (76 mm)	6-3/4" (171 mm)	.15
621-6	3/16" (5 mm)	6" (152 mm)	9-3/4" (248 mm)	.20
621-8	3/16" (5 mm)	8" (203 mm)	11-3/4" (298 mm)	.20
621-10	3/16" (5 mm)	10" (254 mm)	13-3/4" (349 mm)	.25



620-4

Cat. No.	Tip Size	Shank Length	Overall Length	Weight (lbs.)
Heavy-Duty Shanks				
620-4	1/4" (6 mm)	4" (102 mm)	8-11/32" (212 mm)	.20
620-6	5/16" (8 mm)	6" (152 mm)	10-15/16" (278 mm)	.40
620-8	3/8" (10 mm)	8" (203 mm)	13-7/16" (341 mm)	.60

Square-Recess Tip Screwdrivers – Round-Shanks

Additional Features:

- Color-coded handle ends for quick and easy identification.
- Chrome plated shank for corrosion resistance.

Cat. No.	Tip Size	Color Code	Shank Length	Overall Length	Weight (lbs.)
660	#0	yellow	4" (102 mm)	7-3/4" (197 mm)	.20
661	#1	green	4" (102 mm)	7-3/4" (197 mm)	.20
662	#2	red	4" (102 mm)	8-1/4" (210 mm)	.30
663	#3	black	4" (102 mm)	8-1/4" (210 mm)	.30



660


Cat. No.	Tip Size	Color Code	Shank Length	Overall Length	Weight (lbs.)
665	#1	green	8" (203 mm)	11-3/4" (298 mm)	.30
666	#2	red	8" (203 mm)	12-1/4" (311 mm)	.40
667	#3	black	8" (203 mm)	12-1/4" (311 mm)	.40

All dimensions are in inches and (millimeters).



www.kleintools.com

See page 310 for additional information on warnings.



Cushion-Grip Screwdrivers

TORX® Screwdrivers – Round-Shanks

Additional Features:

- TORX® tip drive cuts slippage, saves fasteners and transmits more torque to the work.
- Color-coded handle ends for quick and easy identification.



19544

Cat. No.	TORX® Size	Color Code	Shank Length	Overall Length	Weight (lbs.)
19542	T15	yellow	4" (102 mm)	8-5/16" (211 mm)	.20
19543	T20	green	4" (102 mm)	8-5/16" (211 mm)	.25
19544	T25	blue	4" (102 mm)	8-5/16" (211 mm)	.25

Cat. No.	TORX® Size	Color Code	Shank Length	Overall Length	Weight (lbs.)
19545	T27	brown	4" (102 mm)	8-5/16" (211 mm)	.25
19546	T30	red	4" (102 mm)	8-5/16" (211 mm)	.25

TORX® is a registered trademark of Acument Intellectual Properties, LLC.

Demolition Screwdrivers

Additional Features:

- Engineered, manufactured and tested for prying, chiseling and punching
- Plated metal strike cap to protect handle from hammer blows.
- Heat treated metal shaft runs complete length of handle to metal strike cap to transfer metal strike force.



602-7DD



603-4DD

Cat. No.	Tip Type	Tip Size	Blade Length	Overall Length	Weight (lbs.)
602-4DD	keystone	1/4" (6 mm)	4" (102 mm)	9" (229 mm)	.37
602-7DD	keystone	5/16" (8 mm)	7" (178 mm)	12-3/8" (314 mm)	.56
603-4DD	Phillips	#2	7" (178 mm)	9" (229 mm)	.37 NEW!



Rapi-Driv™ Cushion-Grip Screwdrivers

Rapi-Driv® Screwdrivers


Additional Features:

- Crank-action handle spins screws fast with one hand.
- Saves time and effort, especially on long-threaded screws in switch plates, light fixtures, etc.



670-6

Cat. No.	Tip Type	Tip Size	Shank Length	Overall Length	Weight (lbs.)
670-3	cabinet	3/16" (5 mm)	4" (102 mm)	7-3/4" (197 mm)	.15
670-6	cabinet	3/16" (5 mm)	6" (152 mm)	9-3/4" (248 mm)	.20
671-6	cabinet	1/4" (6 mm)	6" (152 mm)	9-3/4" (248 mm)	.20
681-6	Phillips	#1	6" (152 mm)	9-3/4" (248 mm)	.20
682-6	Phillips	#2	6" (152 mm)	9-3/4" (248 mm)	.25
691-6	square-recess	#1	6" (152 mm)	9-3/4" (248 mm)	.35
692-6	square-recess	#2	6" (152 mm)	9-3/4" (248 mm)	.35



Interchangeable Rapi-Driv™

Additional Features:

- Interchangeable bit holder allows quick switching between tip styles and works with other standard size bits.
- Crank-action handle allows you to spin screws fast with one hand.
- Blast finish bit provides firm grip on fasteners to reduce cam out.




67100

Cat. No.	Contains	Shaft Length	Overall Length	Weight (lbs.)
67100	3/16" (5 mm) slotted, #2 Phillips	6" (152 mm)	9-3/4" (248 mm)	.26

2-in-1 Replacement Bit

Cat. No.	Fits	Description	Quantity	Weight (lbs.)
67101	2-in-1 Rapi-Driv™, 10-in-1, 11-in-1 and 10-Fold™	3/16" (5 mm) slotted, #2 Phillips replacement bit	contains 2 bits	.012



All dimensions are in inches and (millimeters).



www.kleintools.com

See page 310 for additional information on warnings.

